


INSTRUCTION
FOR INSTALLATION AND USE
TWO - POST OUTDOOR BASKETBALL,
REACHES 1,65 m
Accordance with norm PN-EN 1270

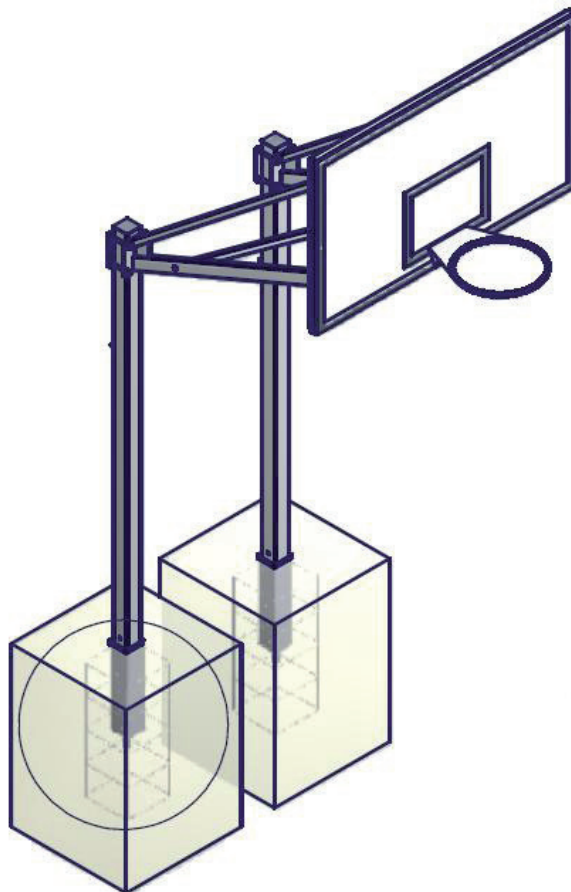

I. List of componets

No.	Nr on drawing	Name of Part	Qty (pcs)
	20	Rectangular cover 100x100 mm	2
1.	19	M12 nut	4
2.	18	M12x65 bolt	4
3.	17	M16 elastic pad	8
4.	16	M16 nut	8
5.	15	M16x140 bolt	8
6a.	14	M12x45 bolt (for fixed ring)	2
6b.	14	M10x40 bolt (for foldable ring)	2
7.	13	Round pad 13 mm (M12)	8
8.	12	Self-locking nut M12	4
9a.	11	M12x80 bolt (for fixe ring)	2
9b.	11	M10x75 (for foldable ring)	2
10.	10	M10 nut	4
11.	9	Round pad 10,5 mm	4
12.	8	M10x25 bolt	4
13.	6	Epoxy backboard 105x180cm (available on metal Frame)	1
14.	5	Section cross	1
15.	4	Horizontal pole	2
16.	3	Boom plate	2
17.	2	Verticla pole	2
18.	7	Fixed or foldable ring	1

II. Product overview

Two-post outdoor basketball set; hot-dip galvanized ; the height of the basketball post can be adjusted between 260-305 cm; total reaches 1,65 m; professional, epoxy basketball backboard, size 105x180 cmon metal frame. Safety certificate B.

III. Purpose



Set is intended solely for outdoor fields and playgrounds . Protected against corrosion with hot-dip galvanized.

IV. Assembly

KOSZYKÓWKA DWUSŁUPOWA TULEJOWANA 1,65m


Od przedniej powierzchni tulej 120x120 do początku linii jest 442mm, między tulejami 910. Fundament 800x800x1100.

UEAGA: Stożki w tulejach muszą być osadzone w fundamencie z tyłu i po lewej stronie tuleji – patrząc od boiska (patrz oznaczenie A)

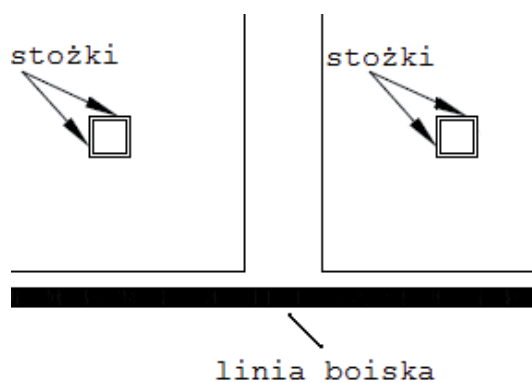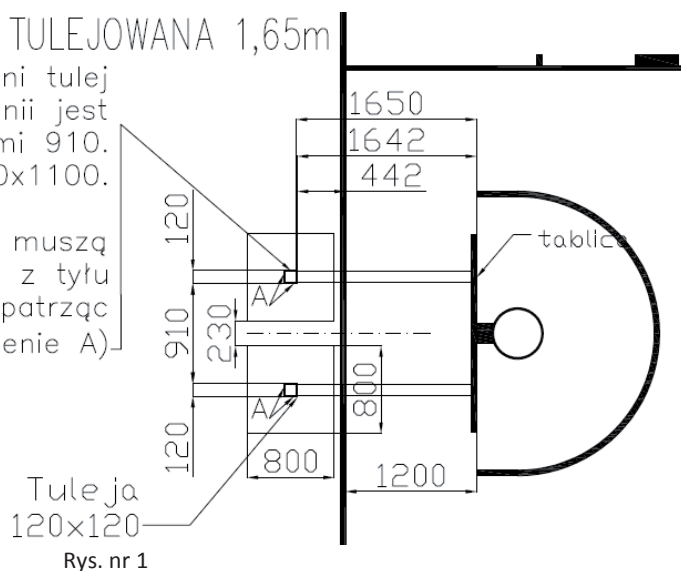


1. Set installation :


- a) Embed vertical posts [2] in socket
- b) With bolt M16x140 [15], plates M16 [16] and nuts M16 [16] and rectangular plate [3] screw on projection posts [4] to the vertical posts[2]

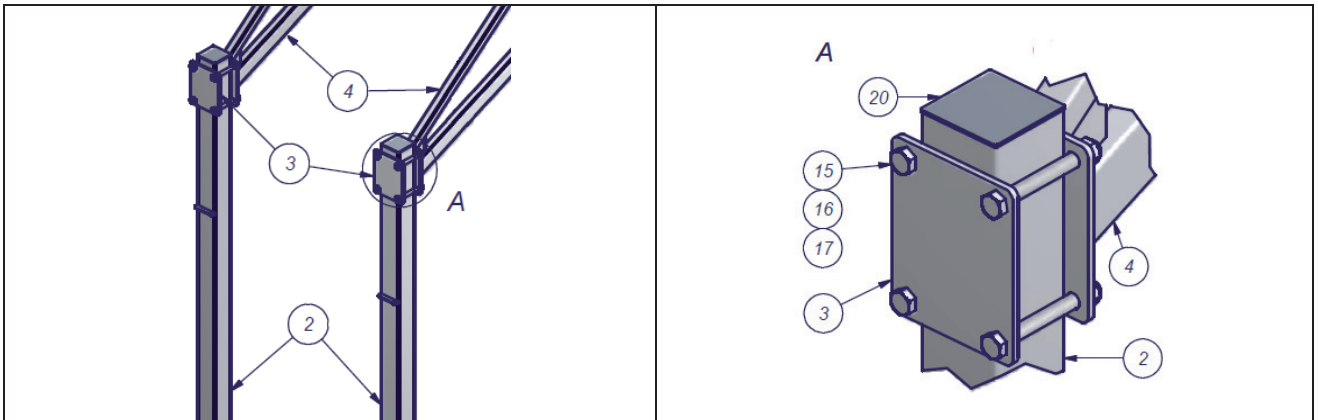


- c) To the horizontal posts [4] screw on with bolt M12x65 [18], plates Ø13 mm [13] and nut M12 [19] section cross [5] (drawing 3 i 4)

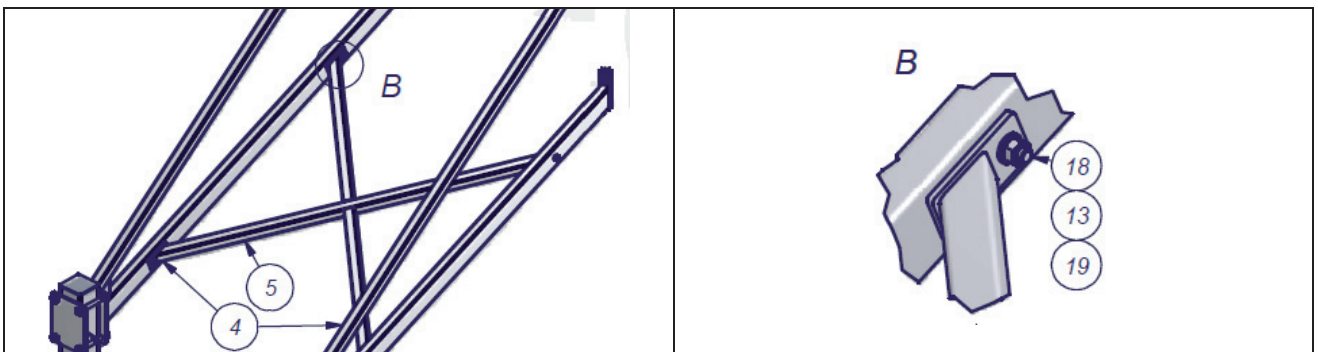

- d) With bolt M10x25 [8], plate Ø10,5 mm [9] and nut M10 [10] screw on epoxy basketball backboard.

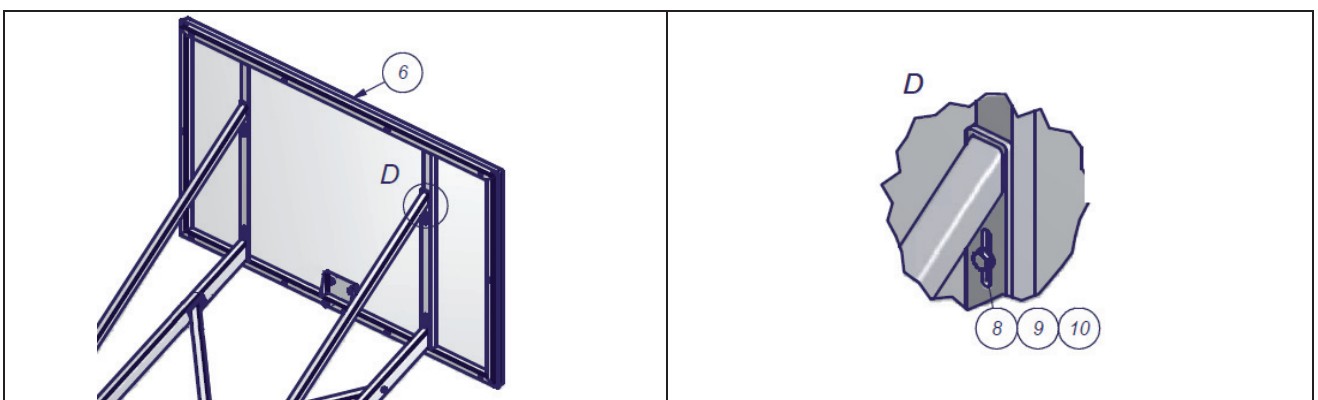

- e) To the backboard [6] screw on ring :
- To the fixed ring use bolts:
 - M12x45 [14] – in the upper holes
 - M12x80 [11] – in the bottom holes
- And plater Ø13 mm [13] Wit nuts M12 [12]



- To the folding ring use bolts :
 - M10x40 [14] – to the upper holes
 - M10x75 [11] – to the bottom holes

- a) To the fixed ring use: bolt M12x60 and self-locking nut M12
b) To the folding ring use: bolt M10x60 with plates, use for the bottom part of the backboard.

V. Use

1. Construction is intended solely to play basketball . Prohibited is to use any another load, climbing to the construction et cetera.
2. Before use, and later during the operation of basketball all mounting knots must be checked and tightened periodically.

VI. Guarantee

1. Basketball and mounting elements are covered by a 24-month guarantee. Nets for ring are covered by a 12-month guarantee.
2. The guarantee does not cover damage caused by improper use, for example, mechanical damage of the basketball or assembly elements, cutting or setting fire to the goal, assembly not conform to the manufacturer's recommendations.